




2018-CURRENT JEEP WRANGLER JL/GLADIATOR JT RUBICON

JEEP JL/JT STEEL BUMPER LZR LIGHT INSTALLATION

KC's 4" round LZR LED lights feature highly efficient CREE LEDs and signature Aluminum Finned-Turbine Design housing for thermal management. Pair includes factory wire connectors and bracket for easy mounting in 18-Present Jeep JL/JT Rubicon Steel bumper fog pockets. The LZR light is for off road use only.

WARNING: Please read all instructions before beginning installation. These guidelines are provided in good faith to help prevent any issues arising from errors during installation. The manufacturer of this product shall not be held responsible for any user actions taken or not taken during installation. There are many details of the installation that are assumed to be general mechanical knowledge to experienced installers; which are not detailed in these instructions. These installation guidelines are intended to serve as professional recommendations and are not a step-by-step, fail-safe installation checklist. Selection of an experienced installer is the sole responsibility of the project owner.

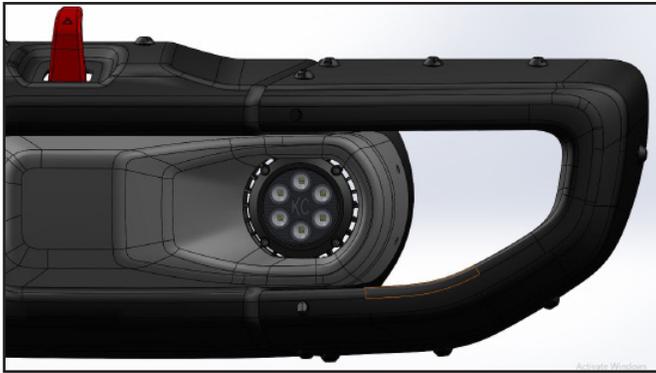

Jeep Wrangler JL/JT LZR light for Rubicon Steel bumper

Parts Included:

QTY 1 - Jeep JL/JT Steel Bumper LZR light pair pack.

TOOLS NEEDED FOR INSTALLATION




10 & 17 mm Socket




6mm Hex Key

INSTRUCTIONS FOR INSTALLATION

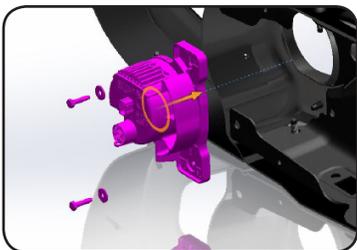

1. REMOVE THE STOCK FOG LIGHT

- Disconnect the OEM fog light connector by carefully prying up on the tab.
- Use a 10mm Socket to remove the stock fog light. There are two bolts that secure the OEM housing to the Steel Bumper.

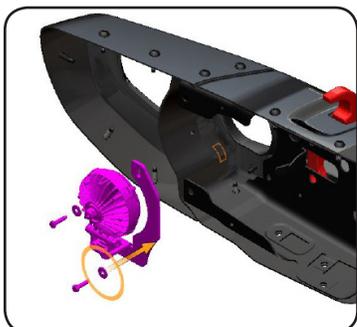

2. SECURE & AIM THE G4 FOG LIGHT

- Attach the new KC LZR light using the same threaded holes and bolts as the one that was removed. Torque the bolts to about 10n*m to fully secure the light to the bumper.
- Loosen the base pinch bolt on the LZR to aim up and down. Connect the Jeep JL/JT OEM H16 connector to the new fog light and secure the excess wire with a zip tie.

JEEP JL STEEL BUMPER LZR FOG LIGHT

3. RE-TORQUE ALL BOLTS (*OPTIONAL*)

- We recommend to check and re-torque all of the bolts that were removed and re-installed during this process after 500 miles of driving to ensure that nothing has loosened.

PRODUCT REGISTRATION

Thank you for becoming part of the KC family and purchasing one of our premium KC products! With over 45 years of history in the auxiliary lighting market, you have become a part of our ever growing family, and we encourage you to register your product online at [HTTP://REGISTER.KCHILITES.COM](http://register.kchilites.com) to ensure you get all the benefits of owning a KC product.