



# 2018-CURRENT JEEP WRANGLER JL SAHARA 2020-CURRENT JEEP GLADIATOR JT OVERLAND

## JEEP JL/JT G4 FOG LIGHT

KC's 4" Gravity® LED G4 LED Fog Lights feature bright CREE LEDs in a street legal fog beam pattern. They have a lightweight magnesium housing with optical reflectors, polycarbonate lens, and universal adjustable bracket for easy mounting on your Jeep Wrangler JL Sahara bumper or Gladiator JT Overland/Rubicon Standard bumper.

*WARNING: Please read all instructions before beginning installation. These guidelines are provided in good faith to help prevent any issues arising from errors during installation. The manufacturer of this product shall not be held responsible for any user actions taken or not taken during installation. There are many details of the installation that are assumed to be general mechanical knowledge to experienced installers; which are not detailed in these instructions. These installation guidelines are intended to serve as professional recommendations and are not a step-by-step, fail-safe installation checklist. Selection of an experienced installer is the sole responsibility of the project owner.*



Jeep G4 Fog light For Sahara/Overland Bumper


### Parts Included:

QTY 1 - JL Sahara/JT Overland (or Rubicon Standard front bumper) Bumper G4 fog light pair pack

### TOOLS NEEDED FOR INSTALLATION



7 & 8 mm Socket

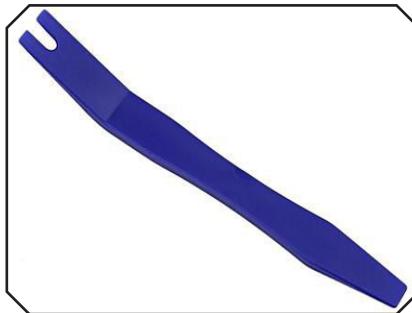

Panel Remover or Flat Screwdriver



5mm Allen Key

### INSTRUCTIONS FOR INSTALLATION




#### 1. REMOVE THE BUMPER SHROUD

- Use the panel remover tool to remove the bumper skid plate (not shown) which is held in place with eight panel clips and two 8mm bolts.

- Remove the plastic panel clips holding the shroud (photo on the left) onto the rear portion of the front bumper. The clips have an inner portion that needs to be removed before the outer portion.

# JEEP JL SAHARA/JT OVERLAND BUMPER G4 FOG LIGHT

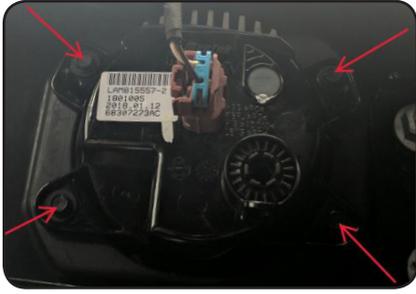

## 2. REMOVE THE STOCK FOG LIGHT

- Disconnect the factory H16 connector on the fog light.
- Use a 7mm socket to remove the four bolts holding the stock fog light in place. After removing the four bolts, the light will be free to remove.



## 3. INSTALL THE KC G4 FOG

- Attach the KC Gravity® LED G4 fog light using the same threaded holes and bolts as the ones that were removed. Torque the bolts to factory specifications to fully secure the light to the bumper.
- Use the 5mm Allen Key to adjust the light. Counter-clockwise will tilt the light up and clockwise will tilt the light down.

## 4. REASSEMBLE THE BUMPER

- Reinstall the rear portion of the front bumper shroud and panel clips.
- Reinstall the bumper skid-plate and panel clips underneath the Jeep.

## 5. RE-TORQUE ALL BOLTS (OPTIONAL)

- We recommend to check and re-torque all of the bolts that were removed and re-installed during this process after 500 miles of driving to ensure that nothing has loosened.

## PRODUCT REGISTRATION

Thank you for becoming part of the KC family and purchasing one of our premium KC products! With over 45 years of history in the auxiliary lighting market, you have become a part of our ever growing family, and we encourage you to register your product online at [HTTP://REGISTER.KCHILITES.COM](http://register.kchilites.com) to ensure you get all the benefits of owning a KC product.