



ADVENTURE
FURTHER®


#59-00153-01IM HARNESS KIT; INSTRUCTION MANUAL
#56-00014-01: 2-POS, 30A FUSED, 40A RELAY, SWITCH HARNESS
#56-00065-01: 2-LIGHT, 2-POS, 3-PIN DT HARNESS EXTENSION

INSTALLATION INSTRUCTIONS

IMPORTANT: Please read all instructions before beginning installation. These guidelines are provided in good faith to help prevent any issues arising from errors during installation. The manufacturer of this product shall not be held responsible for any user actions taken or not taken during installation. There are many details of the installation that are assumed to be general mechanical knowledge to experienced installers; which are not detailed in these instructions. These installation guidelines are intended to serve as professional recommendations and are not as a step-by-step, fail-safe installation checklist. Selection of an experienced installer is the sole responsibility of the project owner.

1. Pre-Installation of Harness & Lights


- After choosing the light location, loosely install the lights before installing harness.
- Pre-assemble the Switch Harness to the 2-Lead Light Harness Extension.

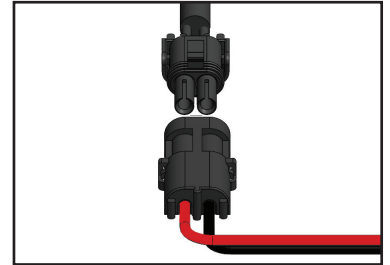

2. Wiring Your Lights: ****Before starting, remove in line fuse & relay for safety****

- Begin by routing the assembled harness from the battery (or power source), away from any moving parts and connect the Leads to the lights.

- Route the three switch leads (spade connectors) toward the desired switch location. To install the switch, drill a 3/4" hole in the desired location to press the switch into. (**Note:** Do not install switch until you have the switch wires routed to the switch location, and then attach the switch wires accordingly before pressing the switch into the mounting hole). Connect the switch wires as follows: **YELLOW** to SUPPLY Terminal on switch, **GREEN** to LOAD Terminal (center), and **BLACK** to EARTH Terminal for the Rocker Switch LED.

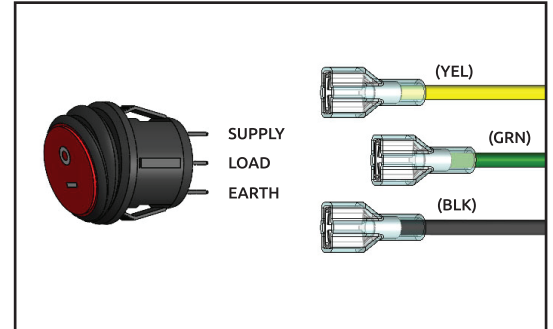

- Mount the Relay close to the battery with blades facing down (sheet metal screw provided). Connect the Yellow Power lead (with ring terminal) to the (+) Positive side of the battery. Connect the Black Ground lead (with ring terminal) to the (-) Negative side of the battery or chassis ground.

3. Connect & Test:

- After the harness has been secured and the Power & Ground properly connected. Re-install the removed fuses and the relay. Test the lights by toggling both Low (-) and High (=) on the Rocker Switch.

